


## TOROIDAL TRANSFORMERS

### FEATURES,

- Low Magnetic Noise
- High Efficiency
- Excellent Load Regulation
- Easy Assembly
- Very Low No-load Losses and magnetizing Current
- Half Size and Weight Comparing to EI Transformer
- Various Input Options  
10V/110V/117V/120V/220V/230V/240V, 50/60HZ
- Dielectric Strength 3KV,1min
- 100% Electric Parameters Test
- Power Range 20VA to 5000VA Available According to Customer's Requirement
- Class B insulation system
- Optional Single or Dual Primary

### OUTLINE DIMENSIONS

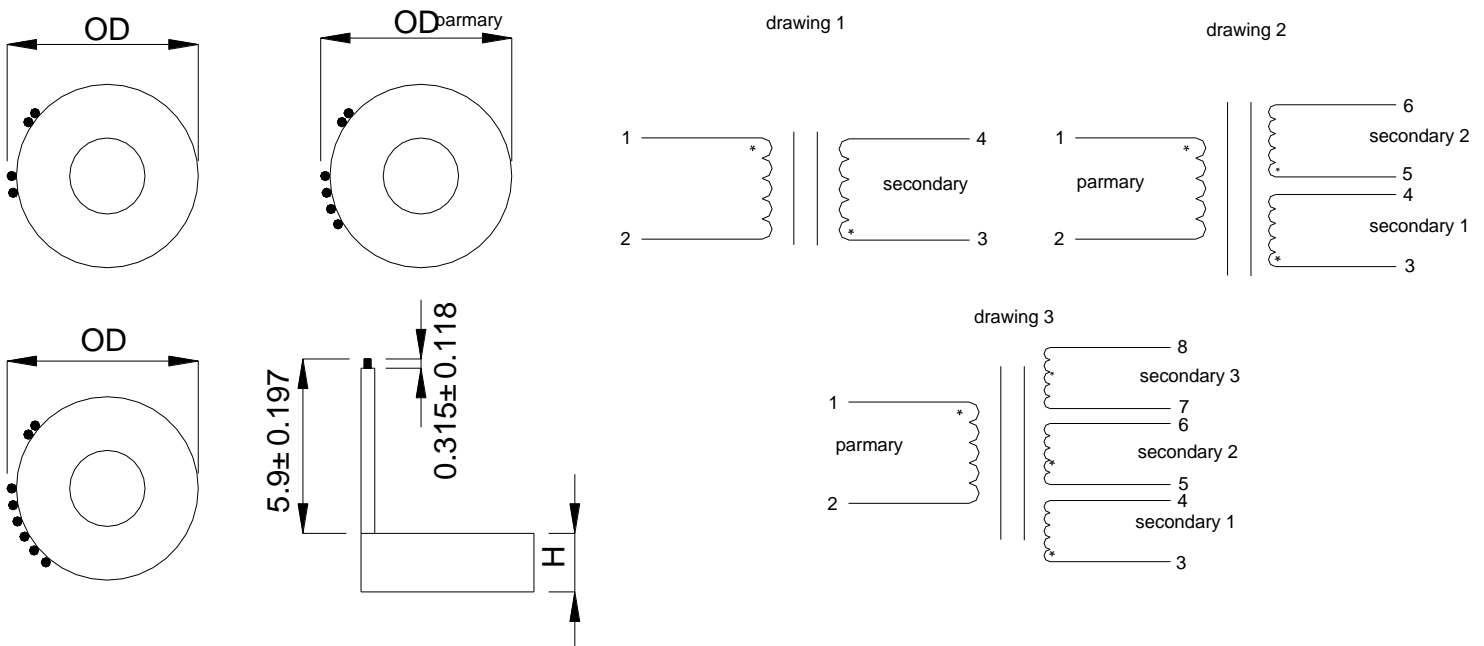

## ELECTRONIC SPECIFICATIONS

Item	Power	AC Outout		Dimension				Weight	
		Voltage tange	Current range	OD		H			
	VA	V	A	In	mm	In	mm	lbs	Kg
1	20	12 ~ 24	0.84 ~ 1.67	2.5	63	1.3	33	0.73	0.33
2	25	12 ~ 24	1.04 ~ 2.08	2.6	65	1.4	35	0.84	0.38
3	30	12 ~ 24	1.25 ~ 2.50	2.8	70	1.6	40	0.99	0.45
4	35	12 ~ 24	1.46 ~ 2.92	2.8	72	1.6	40	1.08	0.49
5	40	12 ~ 24	0.84 ~ 1.67	3.0	75	1.6	40	1.17	0.53
6	45	12 ~ 24	1.67 ~ 3.75	3.0	75	1.6	40	1.26	0.57
7	50	12 ~ 36	1.67 ~ 3.75	3.1	80	1.6	40	1.50	0.68
8	60	12 ~ 36	1.67 ~ 5.00	3.3	83	1.7	43	1.61	0.73
9	70	12 ~ 36	1.95 ~ 5.84	3.3	85	1.7	43	1.83	0.83
10	80	12 ~ 36	2.22 ~ 6.67	3.5	90	1.7	43	2.16	0.98
11	90	12 ~ 36	2.50 ~ 7.50	3.7	95	1.7	43	2.31	1.05
12	100	12 ~ 36	2.78 ~ 8.34	3.9	100	1.7	48	2.65	1.20
13	150	12 ~24 * 2	3.13 ~ 6.25	4.1	105	1.9	50	3.31	1.50
14	200	12 ~24 * 2	4.17 ~ 8.33	4.3	110	2.0	53	3.97	1.80
15	250	12 ~24 * 2	5.21 ~ 10.42	4.7	120	2.1	55	4.85	2.20
16	300	12 ~24 * 2	6.25 ~ 12.50	4.7	120	2.2	58	5.29	2.40
17	350	12 ~24 * 2	7.29 ~ 14.58	4.8	123	2.3	60	5.84	2.65
18	400	12 ~24 * 2	8.33 ~ 16.67	4.9	125	2.4	63	6.39	2.90
19	450	24 ~ 48* 2	4.69 ~ 9.38	5.0	128	2.5	65	6.61	3.00
20	500	24 ~ 48* 2	5.21 ~ 10.42	5.1	130	2.6	65	7.05	3.20
21	600	24 ~ 48* 2	6.25 ~ 12.50	5.2	132	2.6	65	8.42	3.82
22	700	24 ~ 48* 2	7.29 ~ 14.58	5.7	145	2.6	70	9.48	4.30
23	800	24 ~ 48* 2	8.33 ~ 16.67	5.7	145	2.8	73	10.05	4.56
24	900	24 ~ 48* 2	9.38 ~ 18.75	5.9	150	2.9		10.87	4.93
25	1000	18 ~ 36 * 2 30 ~ 60 * 2	6.95 ~ 13.89 4.17 ~ 8.33	6.3	160	3.0	75	12.13	5.50
26	1500	18 ~ 36 * 2 30 ~ 60 * 2	10.42 ~ 20.83 6.25 ~ 12.50	6.7	170	3.1	80	15.54	7.05
27	2000	18 ~ 36 * 2 30 ~ 60 * 2	13.89 ~ 27.78 8.33 ~ 16.67	7.1	180	3.3	85	19.18	8.70
28	3000	12 ~ 24 * 2 24 ~ 48 * 2 40 ~48 * 2	10.42 ~ 20.83 10.42 ~ 20.83 9.38 ~ 18.75	7.7	195	3.5	90	25.57	11.60
29	4000	12 ~ 24 * 2 24 ~ 48 * 2 40 ~48 * 2	10.42 ~ 20.83 15.63 ~ 31.25 12.50 ~ 25.00	8.1	205	3.7	95	31.53	14.30
30	5000	12 ~ 24 * 2 24 ~ 48 * 2 40 ~48 * 2	10.42 ~ 20.83 15.63 ~ 31.25 18.75 ~ 37.50	8.5	215	3.9	100	37.04	16.80