


Dots Detail

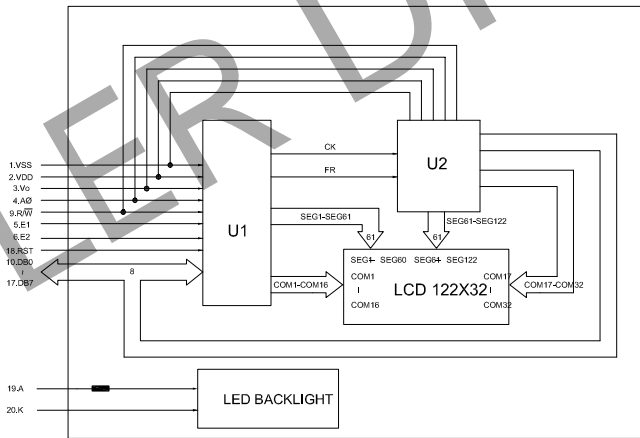

16	K (OV)
15	A(+5.0V)
14	DB7
13	DB6
12	DB5
11	DB4
10	DB3
9	DB2
8	DB1
7	DB0
6	E
5	R/W
4	RS
3	V0(NC)
2	VDD
1	VSS
PIN NO.	SYMBOL

ITEM	SELECTABLE CONTENTS
DISPLAY MODE	STN YELLOW MODE
	STN GRAY MODE
	STN BLUE MODE
	FSTN
POLARIZER TYPE	REFLECTIVE
	TRANSFLECTIVE
	TRANSMISSIVE, POSITIVE
	TRANSMISSIVE, NEGATIVE
VIEWING DIRECTION	6 O'CLOCK
	12 O'CLOCK
LED BACKLIGHT	WHITE
	YELLOW-GREEN
	RED
	GREEN
	BLUE
	AMBER
TEMPERATURE RANGE	STANDARD TEMPERATURE
	WIDE TEMPERATURE
CHARACTER PATTERNS	
OPERATING VOLTAGE	5.0V
LCD DRIVING VOLTAGE	6.8V
LCD DRIVE METHOD	1/32 DUTY 1/6 BIAS
LCD DRIVE IC	ST7920

THE PART NUMBER IN MASS PRODUCTION

1.	STN(Y-G), TRANSFLECTIVE LCD; YELLOW-GREEN BACKLIGHT; 6 O'CLOCK;
2.--	
3.--	
4.--	
DRAWN:	
CHECKED:	
APPROVED:	

UNIT	MM	TOLERANCE
		X.X = ± 0.3
3RD ANGLE		X.XX = ± 0.20
		ANG = -
SCALE:	1:1	

ZETTLER DISPLAYS

XIAMEN ZETTLER ELECTRONICS CO., LTD.

TITLE:	LCM		
MODEL NO:	AGM1232J SERIES	REV	A
PART NO:		SH NO	1/1